


## GroPoint<sup>™</sup> BTDL M12-5 Female Pin Functions

M12-5 Connector Pinout	Function
1	Power
2	External Power (+4.5 to +5.5 VDC)
3	N / A
4	SDI-12 I/O
5	Ground

\*Warning: Exceeding +6.0 VDC on the external power pin may permanently damage the Bluetooth Data Logger.

## GroPoint<sup>™</sup> BTDL M12-5 Female Connector Pinout

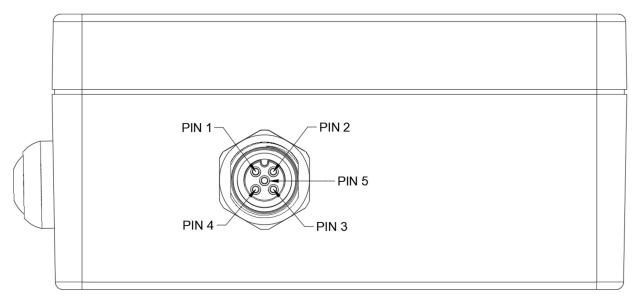

\*See "SDI-12 / MODBUS Sensor M12-5 Connector Wiring Reference" for appropriate sensor wiring.

\*External power is only available with the external power variant of the GroPoint<sup>™</sup> BT-DL and requires the use of a multi-port M12-5 expansion bar.

\*External power requires a power supply capable of supplying a minimum of 1.0-Amp.

Need Help? Email <a href="mailto:support@gropoint.com">support@gropoint.com</a> or visit <a href="mailto:www.gropoint.com">www.gropoint.com</a>/</a> support@gropoint.com</a>

RIOT Technology Corp. | #220 – 10114 McDonald Park Rd | North Saanich V8L5X8, BC Canada | 250 – 412 – 6642 | www.gropoint.com